


# **User Guide**



# **PAXTON**

For more Information: www.wiltec.hk

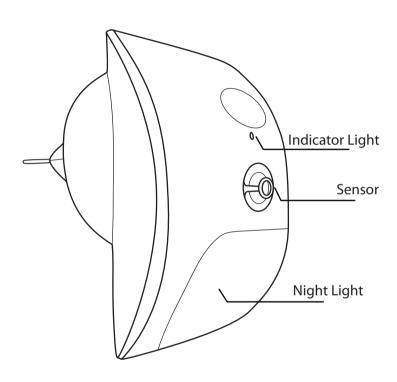

## INTRODUCTION

Thanks for choosing PAXTON, the wise sensor. This appliance is an electronic wireless communication system that allows you detect movement in your baby's room with your Android smartphone via Bluetooth.

Please retain your original dated sales receipt for your records. For warranty service of your Wiltec product, you will need to provide a copy of your dated sales receipt to confirm warranty status.

Registration is not required for warranty coverage.

For product related questions, please contact the shop or agent you purchased Wiltec product.

This User Guide provides you with all the information you need to get the most from your product.

Please read the Safety Instructions on page 3 before you install the units

### **PACK CONTENTS**

1 PAXTON baby monitor unit 1 Quick Start Guide

## WARNING

- This equipment CANNOT IN ANY CIRCUMSTANCES REPLACE the supervision of the baby by an adult.
- Always make sure that electrical appliances is kept out of children's reach.
- When not use the equipment, please unplug from the mains.
- The appliance's range varies according to the obstacles it meets (lie of the land, number of partition walls between the transmitter and the receiver, the presence of metal structures, etc.).
- Please read all the instructions carefully before you use the product.
- Keep the appliances well away from all sources of heat (maximum 40°C) and humidity.
- Check regularly that the product is working properly.
- Clean the appliance with a soft, dry cloth. Do not immerse it in water or expose it to water drops or splashes.
- The product may become warm when the appliance is in use; when you use them, make sure that the heat can disperse and do not cover them.
- The appliance should not be dropped or subjected to violent impacts.
- Use this appliance indoors only; do not use outdoors or expose it to humidity or bad weather.
- Plug this appliance into a wall socket easily reachable by an adult but out of reach of children.
- Do not cover the appliance with a cloth or other objects (fire hazard).
- Do not handle the appliance with moist or wet hands.
- In the case of failure do not try to open or repair the appliance since it does not contain parts that can be repaired or replaced by the user

#### WARNING

- Warning! This appliance is not a toy! Keep out of reach of children. Always make sure that children do not play with the appliance.
- Do not place sources of naked flames, such as lit candles, on the appliance.
- To avoid all risk of electrocution, do not expose the appliance to rain or damp conditions.
- The electricity supply switch should be easily accessible.
- -Never use extension cords.
- -Test this product and all its functions so that you are familiar with it prior to actual use.
- -Do not use the product near water.
- -Do not touch the plug contacts with sharp or metal objects.

## **ATTENTION!**

TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE THE PROTECTION OR ATTEMPT TO OPEN THE PRODUCT.

DO NOT WET THE PRODUCT.

DO NOT EXPOSE TO HUMIDITY OR ATTEMPT TO OPEN THEM. THIS MAY BE A SOURCE OF DANGER AND SHALL VOID THE WARRANTY.

#### SETTING UP PAXTON

#### **PAXTON**

Plug the PAXTON unit into the mains power wall socket. The PAXTON will power on automatically, the Indicator light LED will be flashing and the night light will be on for 15 seconds.

Then, the night light will be turned off if there is no motion detected.

#### **Smart Phone**

Install the "Sensor" APP on your Android Device, which can be found by scanning the QR code below.



NOTE: the "Sensor" APP support only Android Device with Android 4.3 or above, If your device has system lower than that, please update it to Android 4.4.2 or above.

### SETTING UP PAXTON

#### **Smartphone**

Turn on Bluetooth on your smart phone and open the APP.

The APP will connect to the PAXTON automatically, if the PAXTON is on and within the working range.

After successfully connected, the Indicator light LED on the PAXTON will be steady on.

(If the Bluetooth function of mobile phone is not activated, the APP will request to enable the Bluetooth.

Please select "YES" to activate the Bluetooth on smartphone.)

In the APP Main Menu, there is a ring whose color indicates the current status of PAXTON:



- Red: No PAXTON is connected
- Green: The PAXTON is connected and ready to work
- Orange: There is motion detected and the night light of the PAXTON is on.

(Only available in "Auto" mode)

#### APP CONTROL

#### Mode

- Auto slide the button to the "Auto" section, the night light will automatically turn on, for 15 seconds, when PAXTON detects movement.
- 2. Manual user can turn on the night light by sliding the button on the ring to "Manual" section.
- 3. Off the night light will be always off even motion detected. i.e. motion detector is still active.

User can adjust brightness level by sliding the button on the ring within the Auto and Manual section. The night light brightness will be correspondent to the brightness of the blue color ring.



#### **APP CONTROL**



You can tap on "Vibrate" button to toggle between Vibrate/Sound/Silent.

You can tap on the "History" button in the APP to review the event log of the night light.

In Auto mode, the PAXTON will turn on the night light while motion is detected.

A status bar notification and vibrate/sound alert will be sent to smart phone at the same time.

## **APP CONTROL**



In Auto mode, the PAXTON will turn on the night light while motion is detected. A status bar notification and vibrate/sound alert will be sent to smartphone at the same time.

## **TECHNICAL SPECIFICATION**

#### **PAXTON**

Input: 100-240V ~ 50/60 Hz 0.2A

Transmission Frequency: 2400 - 2483.5MHz

Transmission power: 10dBm max

## **Declaration of Conformity**

Hereby, Wiltec declares that Wise Sensor is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

The Declaration of Conformance for Wise Sensor is available from:

www.wiltec.hk/DOC





All rights reserved.

Wiltec HK Company Limited Model: WT-0071

Made in China